


## F1B 41-19

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Rear exhaust with muffler for noise reduction, diverts air away from the operator and prevents the lubricant from soiling work surface
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Magazine without any welded parts makes maintenance easier

## TOOL TYPE

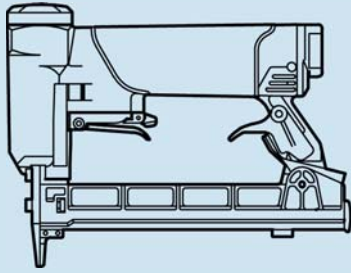

1B 41-19

## TOOL CHARACTERISTICS


Height	Width	Length	Weight
157 mm	42 mm	218 mm	835 g
6.18 inch	1.65 inch	8.58 inch	1.84 lbs

**Pressure** 4 - 7 bar | 60 / 100 psi

**Air consumption per shot** 0.37 l  
Performances at 90 psi / 6.2 bar (0.62 MPa)

**Lubricant** Aerospace Lubricants Tribolube 12

## FASTENER DATA

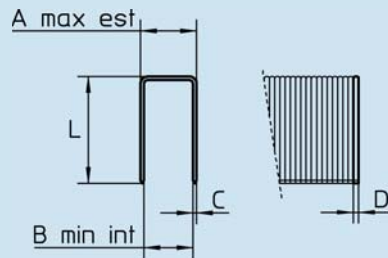

<b>A) Outside Crown</b>	4.70 mm	0.185 inch
<b>B) Inside Crown</b>	3.50 mm	0.138 inch
<b>CxD) Wire</b>	0.50 x 0.75 mm	0.019 x 0.029 inch
<b>L) Length</b>	6 - 19 mm	1/4 - 3/4 inch
<b>Magazine Capacity</b>	180 staples	
<b>Staple Type</b>	Senco N3 (=A)	

## NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$  : 88.40 dB (A) -  $K_{WA,1s}$  , 2.5

$L_{pA,1s}$  : 80.00 dB (A) -  $K_{pA,1s}$  , 2.5

## VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by  
UNI EN ISO 12100-1/2

## ACTUATION & LOADING

**Actuation System\*** 1  
(Safety : Manual)

**Loading\*** Bottom Loading

\*see instruction manual

## APPLICATIONS

- garden furniture
- upholstery
- case backs
- kitchen units
- frame assembly
- mouldings and decorative trims
- baseboards
- boat interiors
- trade shows
- shoe making
- toys and dolls
- saunas
- manufactured houses
- picture frames
- remodelling
- dust covers
- sofas
- insulation
- carpets and underlay
- vehicle panels
- labelling
- umbrellas
- brushes

## FASCO S.R.L. Italy

Via B. Buoizzi 2  
I - 40057 Cadriano di Granarolo (BO)  
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325  
fasco@fasco-tools.com | www.fasco-tools.com

