




F1B 64-16

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Rear exhaust with muffler for noise reduction, diverts air away from the operator and prevents the lubricant from soiling work surface
- Bottom loading magazine speeds the reloading and keeps out the dirt
- Magazine without any welded parts makes maintenance easier

TOOL TYPE

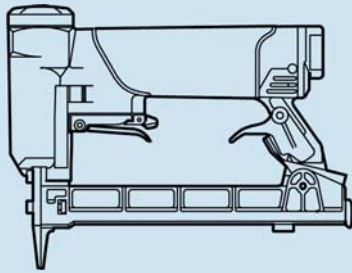

1B 64-16

TOOL CHARACTERISTICS


Height	Width	Length	Weight
157 mm	42 mm	218 mm	780 g
6.18 inch	1.65 inch	8.58 inch	1.72 lbs

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.37 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant BP Energrease LT2, BP Energol HP 10

FASTENER DATA

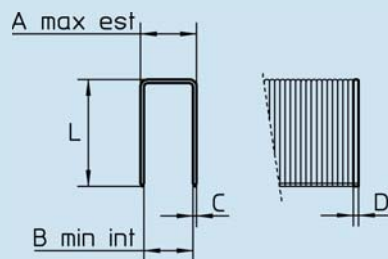

A) Outside Crown	12.45 mm	0.490 inch
B) Inside Crown	11.25 mm	0.443 inch
CxD) Wire	0.50 x 0.75 mm	0.019 x 0.029 inch
L) Length	6 - 16 mm	1/4 - 5/8 inch
Magazine Capacity	180 staples	
Staple Type	Atro 6, BeA 72, Duo-Fast 30, Haubold 1800	

NOISE VALUE

(EN 792-13, EN 12549, EN ISO 4871)

$L_{WA,1s}$: 92.12 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 81.30 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(ISO 8662)

is below the declaration limit set by EN 292 1ADD.A

ACTUATION & LOADING

Actuation System* 1
(Safety : Manual)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- baseboards
- picture frames
- vehicle panels
- upholstery
- boat interiors
- remodelling
- labelling
- case backs
- trade shows
- dust covers
- umbrellas
- kitchen units
- shoe making
- sofas
- brushes
- frame assembly
- toys and dolls
- insulation
- manufactured houses
- carpets and underlay
- mouldings and decorative trims
- manufactured houses
- carpets and underlay

FASCO S.R.L. Italy

Via B. Buoizzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-tools.com | www.fasco-tools.com

