




F21P 65DF-25A

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Wide air storage for a high speed

TOOL TYPE

cod. 11122.01 - 21122.01 -
K31122.01



21P 65DF-25A

TOOL CHARACTERISTICS


Height	Width	Length	Weight
182 mm	49 mm	228 mm	1.02 kg
7.16 inch	1.93 inch	8.98 inch	2.25 lbs

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.36 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

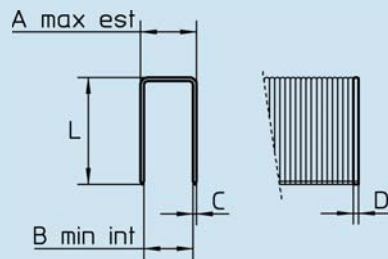

A) Outside Crown	12.50 mm	0.492 inch
B) Inside Crown	10.80 mm	0.425 inch
CxD) Wire	0.75 x 1.25 mm	0.029 x 0.049 inch
L) Length	12 - 25 mm	1/2 - 1 inch
Magazine Capacity	110 staples	
Staple Type	Duo-Fast 65, Haubold 9000, Kihlberg 779	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 97.20 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 90.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by
UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 4
(Safety : CT)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- upholstering
- drawer guides
- case backs
- frame assembly
- panels and profile boards
- mouldings and decorative trims
- baseboards
- boat interiors
- trade shows
- shoe making
- toys and dolls
- TV and HI-FI screens
- manufactured houses
- picture frames
- remodelling
- dust covers
- sofas
- vehicle panels
- labelling
- underlayment
- fruit cases

FASCO S.R.L. Italy

Via B. Buoizzi 2

I - 40057 Cadriano di Granarolo (BO)

Tel. +39 051 / 60 181 | Fax +39 051 / 766 325

fasco@fasco-spa.com | www.fasco-spa.com

