


16 Gauge Wide Crown Stapler



X1S2640

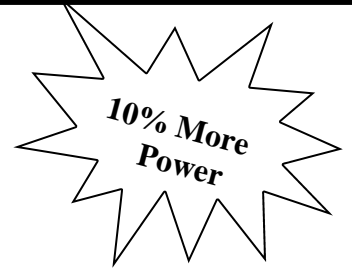

Applications

Crating, Fastening Corrugated Packaging, Insulation Installation, Lathing*, Packaging, Roofing*, Shingle Installation, Wall Paneling Construction



Specifications

| | |
|-----------------|-----------------------|
| Staple Crown | 15/16" |
| Fastener Gauge | 16 Ga |
| Fastener Length | 5/8" to 1-1/2" |
| Staple Capacity | 150 |
| Dimensions | 14" x 3-1/2" x 9-3/4" |
| Firing Mode | Selectable |
| Weight | 5.1 lbs |
| Air Pressure | 80-100 p.s.i. |

Features

360° Adjustable Exhaust, Adjustable Depth Control, Quick Clear Nose, Rubber Grip For Comfort, Restrictive Trigger Available, Walking Stick Available

*Lathing Safety & Roofing Safety Sold Separately

Includes

Plastic Carrying Case, Safety Glasses, Tool Oil, Manual, Parts Diagram

For best results, use Spotnails® collated fasteners

16 Gauge Wide Crown Staples

Spotnails® 2600 & Paslode® GSW16

| Stock No. | Length | Description | M/Cs | Lbs/ Cs | Cs/ Skid |
|------------|--------|-------------|------|------------|-------------|
| 2605PG-10M | 5/8" | Galvanized | 10.0 | 16.30 | 120 |
| 2606PG-10M | 3/4" | Galvanized | 10.0 | 18.20 | 96 |
| 2607PG-10M | 7/8" | Galvanized | 10.0 | 20.10 | 96 |
| 2608PG-10M | 1" | Galvanized | 10.0 | 22.20 | 80 |
| 2610PG-10M | 1-1/4" | Galvanized | 10.0 | 26.40 | 72 |
| 2612PG-10M | 1-1/2" | Galvanized | 10.0 | 31.30 | 60 |

304 Stainless Steel

| | | | | | |
|------------|----|--------|------|-------|----|
| 2608PS-10M | 1" | 304 SS | 10.0 | 22.40 | 80 |
|------------|----|--------|------|-------|----|

Division of Peace Industries, Ltd.

Phone: 800-873-2239 ** Fax: 888-369-2588

www.spotnails.com

