




F21T 90-40A

- Designed with a long and narrow nose for an excellent job visibility
- Rubber comfort grip ensures a non-slip handling and reduces vibrations and fatigue
- One hand latch for a faster reloading and reduced downtime
- Reversible bumper for high durability and increased parts life
- Wide air storage for a high speed

TOOL TYPE



21T 90-40A

TOOL CHARACTERISTICS


Height	Width	Length	Weight
216 mm	49 mm	228 mm	1.24 kg
8.50 inch	1.93 inch	8.98 inch	2.73 lbs

Pressure 4 - 7 bar | 60 / 100 psi

Air consumption per shot 0.43 l
Performances at 90 psi / 6.2 bar (0.62 MPa)

Lubricant Aerospace Lubricants Tribolube 12

FASTENER DATA

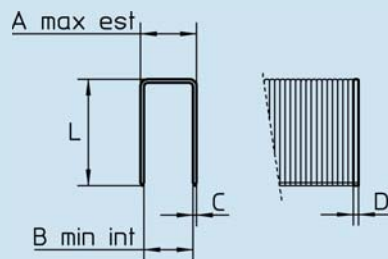

A) Outside Crown	5.70 mm	0.224 inch
B) Inside Crown	3.20 mm	0.125 inch
CxD) Wire	1.00 x 1.25 mm	0.039 x 0.049 inch
L) Length	20 - 40 mm	3/4 - 1 9/16 inch
Magazine Capacity	110 staples	
Staple Type	BeA 90, Duo-Fast 18, Haubold 6000, Senco N4450 (=L)	

NOISE VALUE

(EN 12549+A1 : 2008, EN ISO 4871 : 2009)

$L_{WA,1s}$: 97.20 dB (A) - $K_{WA,1s}$, 2.5

$L_{pA,1s}$: 90.70 dB (A) - $K_{pA,1s}$, 2.5

VIBRATION VALUE

(UNI ISO/TS 8662-11)

is below the declaration limit set by
UNI EN ISO 12100-1/2

ACTUATION & LOADING

Actuation System* 4
(Safety : CT)

Loading* Bottom Loading

*see instruction manual

APPLICATIONS

- garden furniture
- mouldings and decorative trims
- TV and HI-FI screens
- vehicle panels
- upholstery
- baseboards
- manufactured houses
- labelling
- drawer guides
- boat interiors
- picture frames
- underlayment
- case backs
- trade shows
- remodelling
- fruit cases
- frame assembly
- shoe making
- dust covers
- panels and profile boards
- toys and dolls
- sofas

FASCO S.R.L. Italy

Via B. Buoizzi 2
I - 40057 Cadriano di Granarolo (BO)
Tel. +39 051 / 60 181 | Fax +39 051 / 766 325
fasco@fasco-tools.com | www.fasco-tools.com

